



LOOK FOR THE ORANGE STRIPES
NETAFIM

APPLICATIONS

- **13 mil and 13.5 mil** - multi-seasonal, durable surface and subsurface use
- **15 mil** - multi-seasonal, subsurface use (not recommended for surface use)
- **25 mil** - where higher pressures are needed to overcome severe undulation in large fields with long runs.



FEATURES

- Pressure compensating dripline delivers precise flows
- Undulating terrain, large fields with long rows receive exact amounts of water - from the first to the last dripper.
- Wide regulation pressure range from 6 to 36 psi.
- Match the soil's infiltration rates with a wide range of flows, tubing size and dripper spacing.
- Water and nutrients are available to a larger volume of the crop's root zone.

SPECIFICATIONS

- Inside diameter: 0.636", 0.875", 0.990"
- Nominal flow rates (GPH): 0.16, 0.26, 0.32, 0.42
- Common spacings: 8", 12", 18", 24", 30
- Regulating pressure range: 6-36 psi (maximum operating pressure is determined by tubing I.D. and wall thickness)
- Recommended filtration: 120 mesh

FLOW RATE VS. PRESSURE

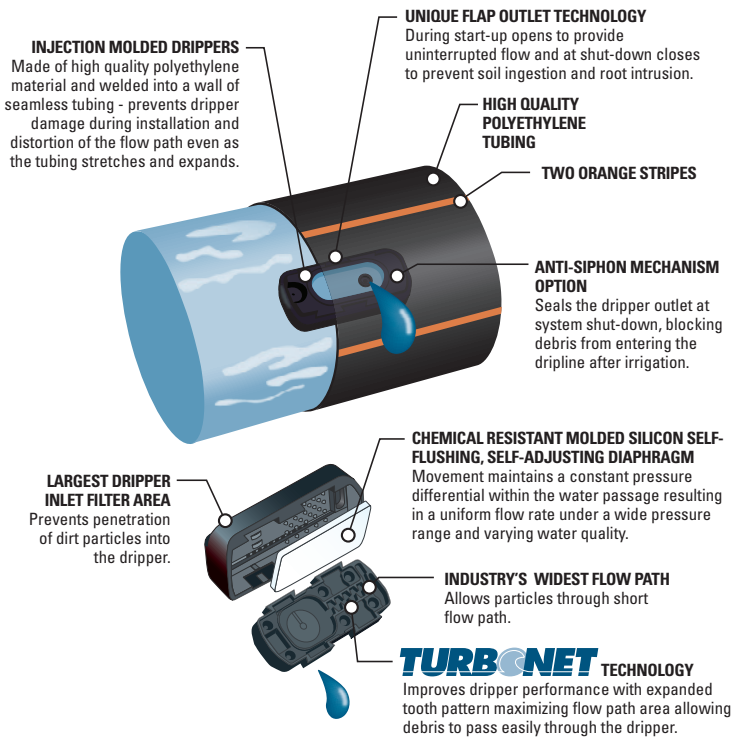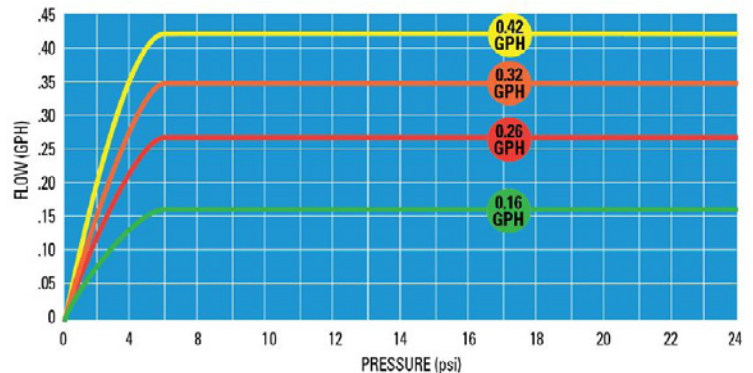

Run charts



DRIPNET PC 25MIL RUN CHARTS

DRIPNET PC 636 SERIES - 25 MIL LENGTH OF RUN @ 0% SLOPE - 96.8% EU

0.16 GPH DRIPPER					
DRIPPER SPACING	INLET PRESSURE (psi)				
	12	18	24	30	36
8"	510	650	750	825	895
12"	710	900	1,040	1,150	1,245
18"	970	1,235	1,420	1,575	1,705
24"	1,200	1,525	1,760	1,950	2,110
30"	1,405	1,795	2,070	2,295	2,485
0.26 GPH DRIPPER					
8"	365	465	535	595	640
12"	510	650	745	825	895
18"	695	885	1,025	1,135	1,225
24"	860	1,100	1,270	1,405	1,520
30"	1,010	1,295	1,495	1,655	1,790
0.32 GPH DRIPPER					
8"	330	415	480	530	570
12"	455	580	665	735	795
18"	620	790	910	1,010	1,090
24"	765	980	1,130	1,250	1,350
30"	900	1,150	1,325	1,470	1,590
0.42 GPH DRIPPER					
8"	270	345	395	435	470
12"	375	475	550	610	665
18"	510	655	755	835	905
24"	635	810	935	1,035	1,120
30"	745	955	1,100	1,220	1,320

DRIPNET PC 875 SERIES - 25 MIL LENGTH OF RUN @ 0% SLOPE - 96.8% EU

0.16 GPH DRIPPER					
DRIPPER SPACING	INLET PRESSURE (psi)				
	9	14	19	24	29
8"	740	1,045	1,240	1,390	1,515
12"	1,010	1,425	1,695	1,900	2,070
18"	1,360	1,925	2,285	2,565	2,800
24"	1,670	2,360	2,805	3,150	3,440
30"	1,955	2,760	3,280	3,685	4,020
0.26 GPH DRIPPER					
8"	535	750	890	1,000	1,090
12"	725	1,030	1,220	1,370	1,490
18"	980	1,385	1,645	1,850	2,020
24"	1,200	1,700	2,025	2,275	2,480
30"	1,405	1,990	2,365	2,660	2,905
0.32 GPH DRIPPER					
8"	475	670	795	890	970
12"	650	915	1,085	1,220	1,330
18"	870	1,235	1,465	1,645	1,795
24"	1,070	1,515	1,800	2,020	2,210
30"	1,250	1,770	2,105	2,365	2,580
0.42 GPH DRIPPER					
8"	390	555	655	735	800
12"	535	755	900	1,010	1,100
18"	720	1,025	1,215	1,365	1,490
24"	885	1,255	1,495	1,680	1,830
30"	1,035	1,470	1,750	1,965	2,145

MAXIMUM PRESSURE RANGES

WALL THICKNESS	OPERATING (psi)	FLUSHING (psi)
636 SERIES 13 MIL	26	39
636 SERIES 15 MIL	32	48
636 SERIES 25 MIL	41	61
875 SERIES 13.5 MIL	22	33
875 SERIES 15 MIL	26	39
875 SERIES 25 MIL	36	54

