



APPLICATIONS

- Fertigation
- Water treatment
- Supplementation
- Disinfection and cleaning
- pH and EC control
- Medicating livestock

FEATURES

- Water driven - no electricity required
- Accurate even with fluctuating flows and pressures
- Made from corrosion resistant materials
- Lower maintenance than other proportional injectors

SPECIFICATIONS

TF-571

Rate of additive: 0.3 - 2%
Water Pressure: 0.2 - 8 bar (2.9 - 120 PSI)
Flow Rate: 20 - 2500 l/h (0.09 - 11 GPM)
Weight: 1.8 kg (4 pound)
Coupling: 3/4"

TF-5

TF-5-001: Rate of additive: 0.1 - 1%
TF-5-002: 0.2 - 2%
TF-5-005: 0.5 - 5%
Water Pressure: 1 - 8 bar (14.7 - 120 PSI)
Flow Rate: 0.2 - 5 m³/h (0.8 - 22 GPM)
Weight: 5 kg (11 pound)
Coupling: 1" or 32mm

TF-10

TF-10-001: Rate of additive: 0.1 - 1%
TF-10-002: 0.2 - 2%
TF-10-005: 1 - 5%
Water Pressure: 1 - 8 bar (14.7 - 120 PSI)
Flow Rate: 0.5 - 10 m³/h (2 - 44 GPM)
Weight: 7.38 kg (16.27 pound)
Coupling: 1.5" or 50 mm

TF-25

TF-25-001: Rate of additive: 0.1 - 1%
TF-25-002: 0.3 - 2.5%
TF-25-005: 1 - 5.5%
Water Pressure: 1 - 8 bar (14.7 - 120 PSI)
Flow Rate: 2 - 25 m³/h (4.4 - 110 GPM)
Weight: 18.60 kg (41.00 pound)
Coupling: 2" or 63 mm



TF-571



TF-5



TF-10



TF-25


Always follow health and environmental safety regulations regarding backflow prevention and chemical use.

Pressure Loss




SOUTHERN IRRIGATION


Intelligent Water Solutions




MixRite TF-571 Models



MixRite TF-5 Models



MixRite TF-10 Models

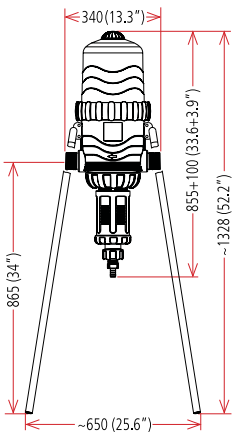

MixRite TF-25 Models

MIXRITE PRESSURE LOSS

