


## **Plastic Septic Tanks**



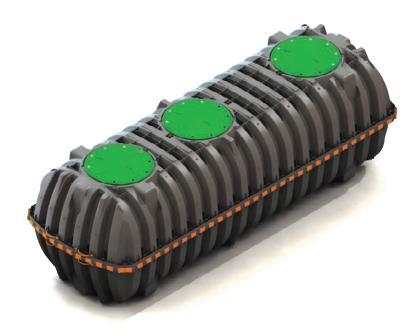

## **APPLICATIONS**

- On site wastewater treatment
- Water retention
- Rainwater collection (non-potable)
- Pump sump basin

## **FEATURES**

- Strong injection molded polypropylene construction
- Lightweight plastic construction and inboard lifting lugs allow for easy delivery and handling
- Integral heavy-duty green lids that interconnect with TW™ risers and pipe riser solutions
- Structurally reinforced access ports eliminate distortion during installation and pump-outs
- Reinforced structural ribbing and fiberglass bulkheads offer additional strength
- Can be installed with 6" to 48" of cover
- Can be pumped dry during pump-outs
- No special installation, backfill or water filling procedures are required



IM-540	
Total Capacity	552 gal (2089 L)
Length	64.9" (1648 mm)
Width	61.7" (1567 mm)
Height	54.6" (1387 mm)
Maximum Burial Depth	48" (1219 mm)
Minimum Burial Depth	6" (152 mm)
Maximum Pipe Diameter	4" (100 mm)
Weight	169 lbs (77 kg)



IM-1060	
Working Capacity	1094 gal (4141 L)
Total Capacity	1287 gal (4872 L)
Airspace	16.5%
Length	127" (3226 mm)
Width	62.2" (1580 mm)
Length-to-Width Ratio	2.3 to 1
Height	54.7" (1389 mm)
Liquid Level	44" (1118 mm)
Invert Drop	3" (76 mm)
Fiberglass Supports	2
Compartments	1 or 2
Maximum Burial Depth	48" (1219 mm)
Minimum Burial Depth	6" (152 mm)
Maximum Pipe Diameter	6" (152 mm)
Weight	320 lbs (145 kg)



1537 gal (5818 L)
1537 gal (5818 L)
1787 gal (6765 L)
16.9%
176" (4460 mm)
62" (1567 mm)
2.8 to 1
55" (1384 mm)
44" (1118 mm)
3" (76 mm)
4
1 or 2
48" (1219 mm)
6" (152 mm)
4" (100 mm)
501 lbs (228 kg)

















## **INFILTRATOR TANK DETAILS**

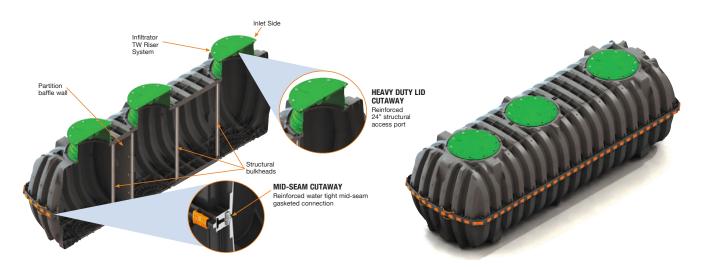



LIFTING STRAP
LIFTING STRAP
LIFTING TOTAL
LIFTING LUG
RISER CONNECTION
(TYPICAL)

127,0 (3226) EXTERIOR LENGTH

TOP VIEW

