



APPLICATION

- Versatile, portable stake mounting option for:
 - R10T
 - R2000
 - R2000LP(FT4)
 - R2000WF
- Sprinkler units perfect for the following applications:
 - Irrigation
 - Frost protection
 - Roof sprinkling for cooling
 - Cooling livestock

FEATURES


- Durable, UV, kink resistant, and flexible PVC tubing
- Fast and simple installation
- Easy nozzle cleaning - kink the tube to stop the flow
- Low cost, high value

SPECIFICATIONS

- Operating range:** FT4: 0.7-2.6 GPM
FT5: 1.0 - 3.1 GPM
- Adapter:** Acme thread #9677
- Largest nozzle:** FT4: #14 2TN - 2.5 2000 FC
FT5: #15 2TN - 2.5 2000FC
- Tubing:** 10mm Flexible PVC
FT4: 36"
FT5: 48"
500' coil
I.D - 0.505" / O.D - 0.355"
- Barb:** FT4: LTO, 10mm Comp x Barb
FT5: QC LTO, 10mm Comp x Male QC
QC barb x 10mm Comp

PRESSURE LOSS PER FOOT


(30.5 cm) of 5 & 10 mm Tubing

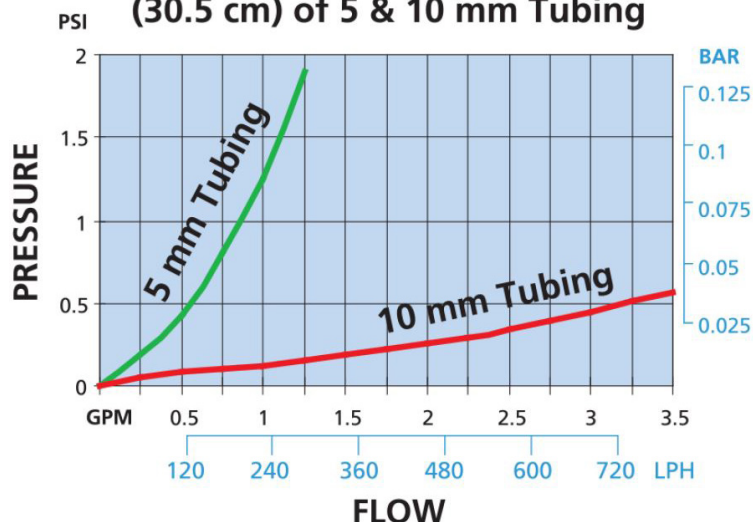

Punch Hole



Insert Barb



Drive Stake



Mount to Stake



Attach Sprinkler

INSTALLATION TOOLS



Tool	Description	Part #
Hand Punch Tool	Creates hole for barb connection - 10mm (White)	NELS-TOOL-9776
Drill Punch Tool	Creates hole for barb connection - 10 mm	NELS-R2000DRILL
Stake Installation Tool	Protects stake when driving into hard ground - 8mm	NELS-STAKE-10288
Drill Installation Tool	Installs QC barb	NELS-R10DRILL

ACCESSORY OPTIONS



Options	Description	Part #
Plug	Plugs hole when barb removed - Goof	NELS-TA-9831
Coupler	Splices tubing - 10mm	NELS-TA-9813
Threaded cap	Shut-off for acme adapter	NELS-ACME-448
Female ACME x 1/2" PVC spigot	For extending riser	NELS-ACME-435
1/2 spigot x comp. barb	Connects tubing to PVC	NELS-TA-SPIG-COMP