SOUTHERN IRRIGATION
Intelligent Water Solutions

Dripnet PC Heavywall Dripline

NETAFIM™

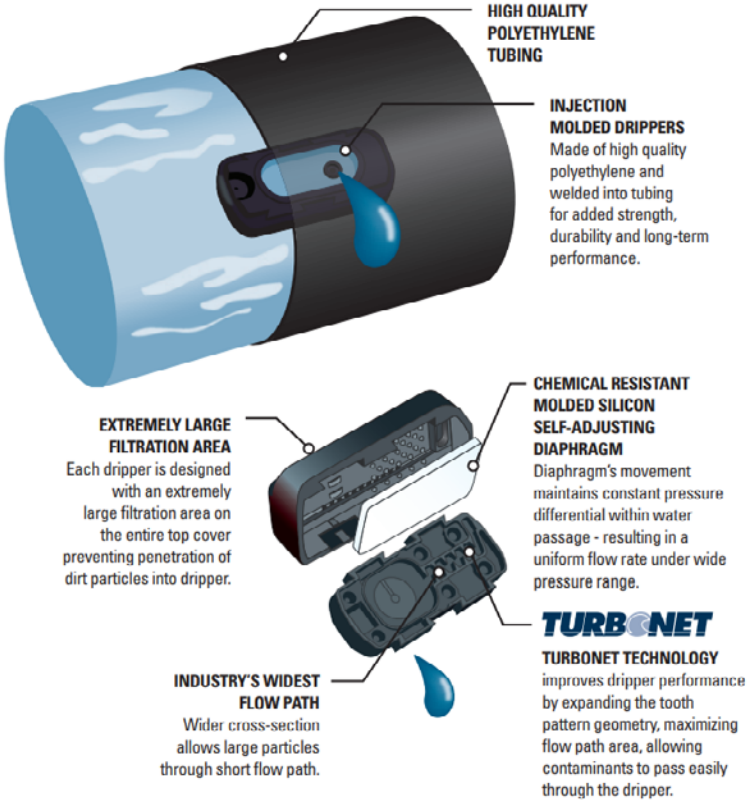

APPLICATIONS

- For surface, subsurface or on-wire irrigation
- Berries, vineyards, greenhouses, nurseries
- Hilly or level terrain
- Very long laterals
- Long term crops
- Poor water quality

FEATURES

- Pressure compensated
- Seamless construction
- Flap outlet impedes soil ingestion and root intrusion
- Wide regulation pressure range
- Industries widest flow path
- Large filter inlet on dripper
- Anti-siphon mechanism

SPECIFICATIONS

Inside Diameter:	0.570" (17mm, 45 mil wall) 0.620" (18mm, 45 mil wall) 0.690" (20mm, 48 mil wall)
Regulating Pressure Range:	7 to 58 psi
Recommended Filtration:	120 mesh
Roll Length:	1000'
Flow rate:	0.26, 0.42, 0.6, 0.9 gph
Dripper spacing:	6", 12", 18" 24", 30", 36"
Vineclip wire size:	11 or 12 gauge (2.05-2.30mm)

OPTIONS

- Vineclip - connection of dripline to wire
  - prevents water migration

FLOW RATE VS PRESSURE

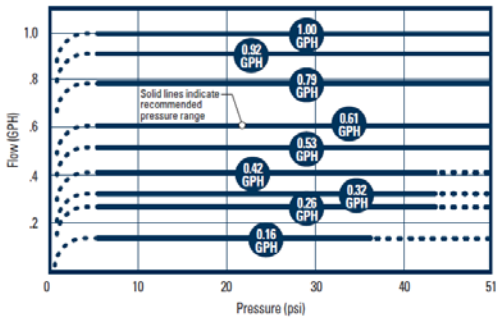

Headloss Charts

DRIPNET PC HEADLOSS CHARTS

DRIPNET PC 17MM (0.570")

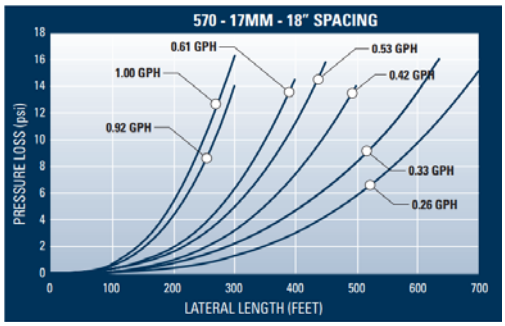

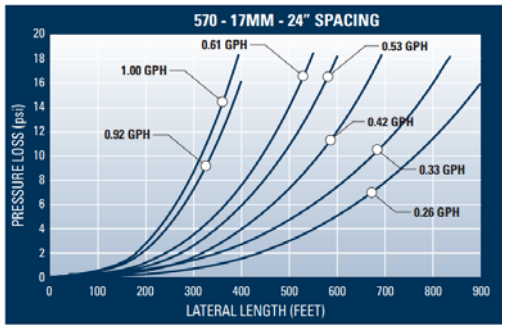

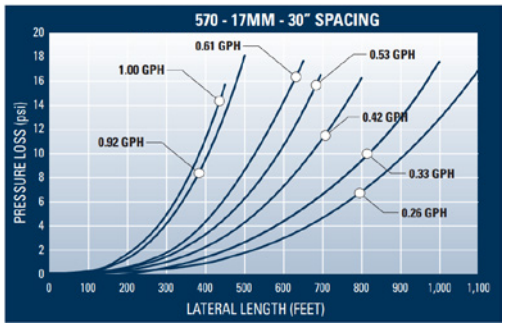

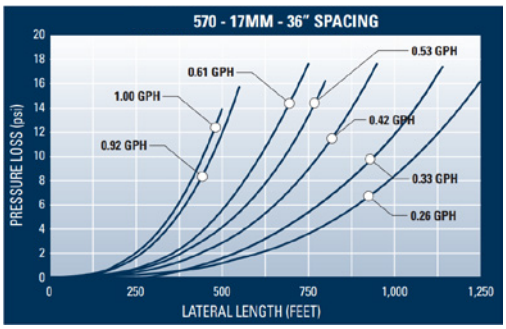

DRIPNET PC 18MM (0.620")

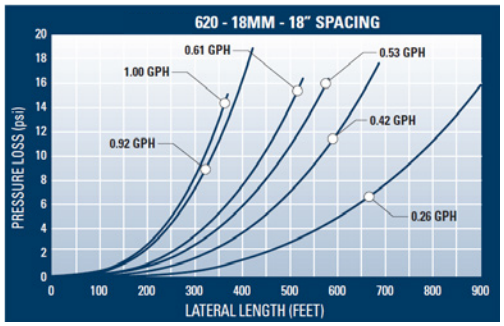

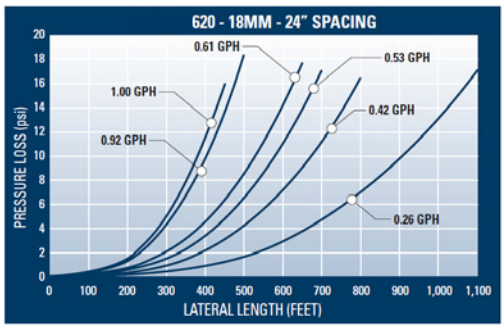

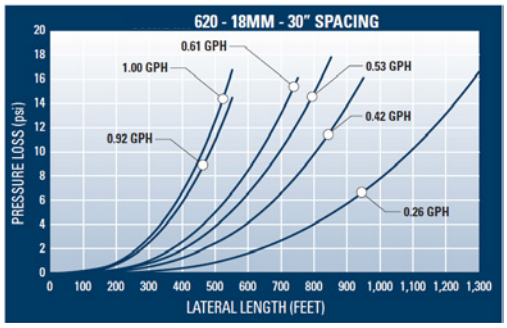

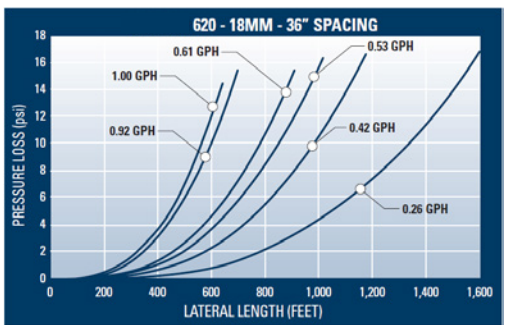

DRIPNET PC 20MM (0.690")